

01-21-00

A

THE COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington D.C. 20231  
Box Patent Applications

Case Docket No. SCEI 16.895  
Filed by Express Mail  
(Receipt No. EL522353502US)  
on January 20, 2000  
pursuant to 37 CFR 1.10  
by [Signature]

S I R:

Transmitted herewith for filing is: ☒ a new application  
☐ a c-i-p application of S.N. \_\_\_\_\_ filed \_\_\_\_\_

Inventor(s): Toru MORITA

For: METHOD FOR GENERATING PLAYBACK SOUND, ELECTRONIC DEVICE, AND  
ENTERTAINMENT SYSTEM FOR GENERATING PLAYBACK SOUND

Enclosed are:

- ☒ 8 sheets of drawings.(Figs. 1A,1B,2-4,5A-5C,6A,6B,7A,7B,8A,8B)  
☒ Specification, including claims and abstract ( 25 pages)  
☒ Declaration  
☒ An assignment of the Invention to SONY COMPUTER ENTERTAINMENT INC.  
☒ A certified copy of Japanese Application No. 11-013508  
☒ An associate power of attorney  
☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27  
☒ Post card  
☒ Recording fee (as indicated below)  
☐ Information Disclosure Statement, PTO-1449, copies of \_\_ references  
☐ Other \_\_\_\_\_  
☐ Other \_\_\_\_\_

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	14-20 =	0
INDEP CLAIMS	6-3 =	3
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

\*If the difference in Col. 1 is less than  
zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$345
x 9 =	\$
x 39 =	\$
x 130 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$690
x 18 =	\$
x 78 =	\$234
x 260 =	\$
TOTAL	\$924

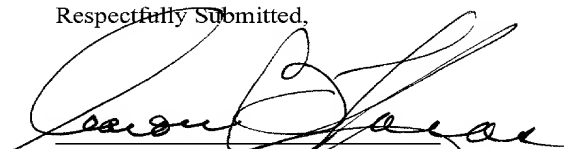
☐ Please charge our Deposit Account No. 08-1634 the amount of \_\_\_\_\_ to cover the filing fee  
and recording fee (if any)

☒ A check in the amount of \$964.00 to cover the filing fee and the recording fee (if any) is enclosed.

☒ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or  
credit overpayment to Deposit Account No. 08-1634. A duplicate copy of this sheet is enclosed.

Helfgott & Karas, P.C.  
60th Floor  
Empire State Building  
New York, New York 10118-6098  
(212)643-5000

Respectfully Submitted,



Date: January 20, 2000

Any fee due with this paper, not fully  
covered by an enclosed check, may be  
charged on Deposit Acct No. 08-1634

- ☒ Aaron B. Karas, Reg. No. 18,923  
☐ Samson Helfgott, Reg. No. 23,072  
☐ Leonard Cooper, Reg. No. 27,625  
☐ Linda S. Chan, Reg. No. 42,400  
☐ Jacqueline M. Steady, Reg. No. 44,354  
☐ Harris A. Wolin, Reg. No. 39,432

01/20/00  
jc760 U.S. PTO

09488373-012000

jc678 U.S. PTO  
09/488373  
01/20/00

Filed by Express Mail  
(Receipt No. EL59235 350245)  
on 1/20/00  
pursuant to 37 C.F.R. 1.10.  
by 2602562

METHOD FOR GENERATING PLAYBACK SOUND, ELECTRONIC DEVICE AND ENTERTAINMENT SYSTEM FOR GENERATING PLAYBACK SOUND

This invention relates to a method in which a clear playback sound that is faithful to the original sound can be formed by dynamically altering the interrupt period with respect to the CPU, and an electronic device and entertainment system that implement this method.

In an information device such as an entertainment system as exemplified by a TV game machine, game data can be stored (saved) to or read (loaded) from a memory card that is provided. In using such a memory card, the card is inserted into the main unit (parent machine) of the information device. For this purpose, the memory card has an interface for connecting it with the main unit (parent machine) of the information device and a nonvolatile memory element for storing data.

Figure 1A is a block diagram of the key parts of such a memory card. This memory card 10 has a control unit 11 for controlling its operation, a connector 12 for connecting it to a mounting terminal provided in a slot of the information device, etc. that is the main unit, and a nonvolatile memory 16 for storing data. Connector 12 and nonvolatile memory 16 are connected by control unit 11.

Control unit 11 is, for example, a microprocessor (so labeled in the diagrams).

Used as nonvolatile memory 16 is, for example, a flash memory such as an EEPROM

(electrically erasable and programmable ROM). A microprocessor is sometimes also used

in the connection interface with the information-device parent machine as a control unit for interpreting the protocol.

Figure 1B shows the control elements in control unit 11 of memory card 10. The memory card has a main unit connection interface 11a for connecting with the main unit (parent machine) of the information device, etc., and a memory interface 11b for inputting and outputting data to and from the nonvolatile memory.

A video game device stores game data, etc. in an auxiliary memory and has the function of reading it out again, and the memory card 10 is used as such a video game device auxiliary memory.

Figure 2 shows an example of a video game device that uses a memory card as an auxiliary memory. Main unit 2 of this conventional video game device 1 has a disk mounting unit 3, which is accommodated in a roughly rectangular housing and in the center of which is mounted an optical disk, which is a recording medium on which video game application programs are stored, reset switch 4 for resetting the game at will, a power switch 5, an open button 6, which opens the cover of the disk mounting unit, and, for example, two slots 7A and 7B.

Memory card 10, which is used as an auxiliary memory, is mounted in slots 7A and 7B, and data such as the results of a game played on video game device 1 is sent from a control unit (CPU) 19, which is built into main unit 2, and is written into nonvolatile memory 16.

Multiple operation devices (controllers) not pictured can also be connected to said slots 7A and 7B, allowing multiple game players to play competitive games, etc. simultaneously.

Instead of memory card 10 connected to memory card slots 7A and 7B of the parent machine of the entertainment system, it has been proposed that a portable electronic device having the function of executing a TV game or other program be connected detachably. That is, it has been proposed that at least part or all of a program such as a TV game be downloaded, the program itself be executed, and if the program is a game in which characters appear, it be given the function of being able to allow the growth, etc. of the characters in the game.

Such a portable electronic device (child machine) can be used without modification as a portable information terminal, and by having a communication unit with other devices (parent machine or child machines), its range of applications as an information terminal can be expanded, thereby leading to the stimulation of new demand for the entertainment system.

Such a portable electronic device must have the sound functions of producing music and sound effects in the portable electronic device itself in order to execute, separately and independently from the parent machine, TV games, etc. downloaded from the parent machine when it has been removed from the parent machine.

On the other hand, the functions, size, and price of a portable electronic device impose certain restrictions on the CPU and sound-system devices that it can have inside it.

Under these circumstances, it is desirable to obtain sound that is a clear, faithful reproduction of the original sound built into the game software.

Therefore an object of this invention is to provide a method for obtaining, in an electronic device, clear playback sound that is faithful to the original sound.

5 Another object of this invention is to provide, in an electronic device, sound functions by which playback sound can be obtained that is faithful to the original sound.

Yet another object of this invention is to provide an electronic device that has sound functions by which playback sound can be obtained that is faithful to the original sound.

Still another object of this invention is to provide an entertainment system that has a  
10 portable electronic device that has sound functions by which playback sound can be obtained that is faithful to the original sound.

### Summary of the Invention

The above objects of the present invention are attained by a method for generating a  
15 playback sound, wherein a CPU interrupt signal is dynamically changed in accordance with read-out sound data, the timing between said sound data and the timing said CPU interrupt signal is made to agree by sending to the speaker said sound data obtained in connection with said CPU interrupt signal, and clear playback sound is generated.

Also, in the method for generating playback sound, the period of the CPU interrupt  
20 signal is dynamically changed in accordance with the period of the read-out sound data, the timing between said sound data and the timing said CPU interrupt signal are made to agree

000270" EZE88460

with each other by sending to the speaker said sound data obtained in connection with said CPU interrupt signal, and a clear play-back sound is generated.

Further, in the method for generating playback sound, image data and audio data is played back under CPU control, the timer unit that generates the CPU interrupt signal is controlled in accordance with the played-back audio data, the interrupt signal is dynamically changed, the timing between said sound data and the timing said CPU interrupt signal are made to agree with each other, and the burden on said CPU is reduced, by sending to the speaker said sound data obtained in accordance with said CPU interrupt signal, and a clear playback sound is generated from said speaker.

Moreover, an electronic device according to the present invention comprises a timer unit that generates a CPU interrupt signal, a CPU unit that specifies the sound data by the timing of said interrupt signal, a D/A converter unit that converts said sound data to an analog signal, and a speaker that emits sound that corresponds to said analog signal, wherein said CPU unit controls said timer unit in accordance with the period of said sound data, dynamically changes the period of said CPU interrupt signal, causes the timing of the switching of said sound data and the period of said CPU interrupt signal to agree with each other, and generates a clear playback sound.

An electronic device according to the present invention comprises a clock unit, a timer unit that is connected to said clock unit and generates an interrupt signal using a down-counter; an interrupt controller unit that is connected to said timer means; a CPU unit that is connected to said interrupt controller means; a bus controller means that is connected to said CPU means; a D/A converter means that is connected to said bus controller means;

an amplification means that is connected to said D/A converter means; and a speaker that is connected to said amplification means, wherein said CPU means controls said down-counter based on the period of the sound data, generates said interrupt signal, determines the sound data based on said interrupt signal, emits sound data via said bus controller and said amplification unit to said speaker, and generates a clear playback sound.

Moreover, an entertainment system according to the present invention comprises a parent machine that has the function of executing programs; a portable electronic device, which is a child machine that is detachably mounted on said parent machine, and an interface for making an electrical connection with respect to said parent machine; said portable electronic device including a timer unit that generates a CPU interrupt signal, a CPU unit that specifies the sound data by the timing of said interrupt signal, a D/A converter unit that converts said sound data into an analog signal, and a speaker that emits sound in accordance with said analog signal.

## **Brief Description of the Drawings**

Figure 1 is a block diagram of a conventional memory card (child machine);

Figure 2 shows the state in which the memory card of Figure 1 is mounted on a video game device (parent machine);

Figure 3 shows an entertainment system consisting of a video game device (parent machine), a controller (child machine), and a portable electronic device (child machine);

Figure 4 is a perspective view of an entertainment system in the state in which the portable electronic device (child machine) is mounted on the video game machine (parent machine);

Figs. 5A, 5B and 5C are plan, front and base views, respectively of a portable  
5 electronic device;

Figure 6A is a block diagram of a portable electronic device;

Figure 6B shows the control elements of the control unit shown in Figure 6A;

Figure 7A shows the sound generation function blocks for a fixed-period CPU  
interrupt signal;

10 Figure 7B shows the sound generation function blocks for which the period of the CPU interrupt signal is determined based on the sound waveform;

Figure 8A shows the relationship between the sound waveform generated by the sound generation function blocks of Figure 7A and the fixed-period interrupt period; and

15 Figure 8B shows the relationship between the sound waveform generated by the sound generation function blocks of Figure 7B and a dynamically changing interrupt period.

### Detailed Description of the Preferred Embodiments

[whole entertainment system]

20 Figure 3 shows an overall external view of the entertainment system relating to this mode of implementation. The entertainment system has a video game device (parent machine) 1, a controller 20, which is connected to this video game device 1, and a portable



electronic device (child machine) 40, which is connected detachably to the video game device 1 and is capable of data communication with the video game device 1.

Video game device (parent machine) 1 shown in Figures 3 and 4 is configured for reading application programs, such as for example, a game software recorded on a recording medium such as an optical disk, and executing the software in accordance with instruction operations of the user (the game player) via controller 20. For example, by execution of the game, it performs mainly control of the progress of the game, display control, and audio control, etc.

As shown in the perspective view of Figure 4, a main unit 2 of video game device 1 has a disk mounting unit 3, which is accommodated in a roughly rectangular housing and in the center of which is mounted an optical disk, such as a CD-ROM, which is a recording medium for supplying video game and other application programs, a reset switch 4 for resetting the video game at will at any time, a power switch 5, a disk release operation switch 6 for performing the operation of mounting an optical disk, and two slots 7A and 7B.

Video game device 1 can be constructed so that it is supplied application programs via a communication circuit as well as from a recording medium.

The portable electronic device 40 and controller 20 can be connected detachably to slots 7A and 7B formed in the side of the housing. The game player can control the progress of the game using controller 20. A memory card (symbol 10 in Figure 2) to which the content of the executed game can be recorded (saved) and from which the content of a recorded game can be read can be mounted in slots 7A and 7B.

As shown in the bottom half of Figure 3, controller 20 has first and second operation units 21 and 22, left button 23L and right button 23R, a start button 24, a selection button 25, operation units 31 and 32 that are capable of analog operation, an analog/digital mode selector switch 33 that selects the operation mode of operation units 31 and 32, and a LED display unit 34 for displaying the selected operation mode.

Provided inside controller 20 is a vibration mechanism (not shown) that operates in an analog mode; it is made so as to give the game player a feeling of presence by vibrating controller 20 in response to, for example, a scene in the video game.

By connecting controllers 20 to slots 7A and 7B, respectively, two game players can share this entertainment system. For example, a competitive game can be played by two game players. The number of slots 7A and 7B is not limited to two as is the case here.

In an entertainment system constructed in this way, portable electronic device 40 can be detachably attached to parent machine 1 of the entertainment system.

[Portable electronic device]

(the child machine)

Figure 5 shows the portable electronic device 40, Figure 5A is a plan view, Figure 5B being a front view, and Figure 5C being a base view. The portable electronic device 40 has a housing 401 and has operation unit 420 for various information input, display unit 430, which consists of a liquid crystal display (LCD), and window 440 for performing communication by a wireless communication unit using, for example, infrared rays.

Housed inside housing 401, which consists of upper shell 401a and lower shell 401b, is a substrate on which are mounted a CPU, a D/A converter, memory elements, etc.

Housing 401 is shaped so as to allow insertion into slots 7A and 7B of the main unit (parent machine) of the entertainment system in the mode described in detail below.

Window 440 is provided at the other end of housing 401, which is formed in a roughly semicircular shape. LCD display 430 takes up about half the area of upper shell 401a, which constitutes part of housing 401, and is positioned near window 440.

On the upper surface part of housing 401, an operation unit 420 has one or more operation buttons 421, 422 for performing event input and making various selections, is formed in an upper shell 401a in the same way as window 440, and takes up about half the area of the side opposite the part where window 440 is positioned. Also, operation unit 420 is positioned on cover 410, which is supported rotatably about pivots 410a and 410b with respect to housing 401.

Operation buttons 421, 422 are arranged from the upper surface side to the lower surface side of cover 410 and pierce cover 410. Operation buttons 421, 422 can move in or out with respect to the upper surface part of cover 410 and are supported by cover 410.

Portable electronic device 40, which is inside housing 401, has a substrate positioned opposite the position of cover 410, and also has switch pressing units on top of the substrate. With cover 410 closed, the switch pressing units are provided in positions corresponding to the positions of operation buttons 421, 422. Thus when operation buttons 421, 422 are pressed, the switch pressing units press pressing switches such as diaphragm switches.

[Connection with the parent machine]

As shown in Figure 4, the portable electronic device (child machine) 40 can be electrically and mechanically connected, with cover 410 rotated about 90 degrees or more and in open state, by inserting the part formerly covered by the cover into one or both of slots 7A and 7B provided on the side of parent machine 1. By thus making an electrical  
5 connection with parent machine 1, a game player can download to child machine 40 all or part of TV game software that had been executed on the parent machine.

Thereafter, child machine (portable electronic device) 40 to which the game software has been downloaded can be taken out of slot 7A or 7B of parent machine 1, and the game can be played separately and independently. And after the game has been played  
10 to some extent, one can reconnect to parent machine 1, return the progress data of the game thus far to parent machine 1 (upload it), and the rest of the game can be played on parent machine 1.

#### [Configuration of the child machine]

Figure 6 is a block diagram of portable electronic device (child machine) 40. Child  
15 machine 40 has a control unit 441, a connector 442, input units 421 and 422, a display (LCD) 430, a clock unit 445, a nonvolatile memory 446, a speaker 447, a wireless communication unit 448 as a data transmission and reception unit, a wireless reception unit 449, a battery 450, a power source terminal 451 and a diode 452 for a power storage unit.

Control unit 441 is, for example, a microprocessor (labeled as such in the diagram).

20 Connector 442 is a connection unit for connecting to the slot of another information device such as the parent machine 1, and it has a data communication function for sending and receiving data to and from the parent machine 1.

Input units 421 and 422 include operation buttons, etc. for operating a stored program.

Display 430 is a liquid crystal display (LCD), etc., which is a display unit for displaying various information.

5        Clock unit 445 is constructed so as to display the time; for example, it can perform time display to display 430.

Nonvolatile memory 446 is an element for storing various data. For example, one can use for nonvolatile memory 446 a semiconductor memory element, such as a flash memory, in which the stored state lingers even if the power is cut off. Therefore the  
10        portable electronic device 40 can also be like conventional memory card 10.

Because the portable electronic device 40 has battery 450, one can use as nonvolatile memory 446 a static random access memory (SRAM), which allows data to be input and output at high speed. Also, the provision of battery 450 makes it possible to operate the device independently even in the state in which it is removed from parent  
15        machine 1.

Battery 450 may be, for example, a rechargeable secondary battery. With portable electronic device 40 inserted into the video game device, battery 450 supplies power from video game device (parent machine) 1. In this case, power source terminal 451 is connected to the connection terminal of battery 450 via the reverse current prevention diode  
20        452, and power is supplied when it is connected to video game device main unit 2.

Wireless communication unit or means 448 is constructed so as to make it possible to perform data communication with another electronic device, etc. by, for example, infrared rays.

Wireless reception unit 449 is a part that is constructed to have an antenna and demodulation circuit, etc. That is, it is the part that receives various data that is transmitted by wireless broadcasting.

The speaker 447 is constructed as a sound generation unit that generates sound in accordance with the program, etc.

All of the above parts are connected to control unit 441 and operate under the control of control unit 441.

Figure 6B shows the control elements for the control unit 441. An ordinary memory card 10 has only a main unit connection interface 41a to parent machine 1 and a memory interface 41b for the input and output of memory data. The portable electronic device 40 has, in addition to these interfaces, a display interface, an operation input interface, an audio interface, a wireless communication interface, and a clock management (hereabove, 41c) and a program download interface 41d.

If, for example, the power of portable electronic device 40 is turned on, control unit 441 performs initialization of the operation confirmation, etc. of portable electronic device 40 as a whole, then executes the application program stored in a program memory 441a. By execution of this application program, control unit 441 controls display 430, speaker 447, etc. in accordance with the input operation from the game player and controls the display of images and the generation of sound effects and music.

[Sound interrupt function]

With such portable electronic device 40, sound effects and music to match the display of images are generated in accordance with the progress of the game.

Figure 7A shows the details of control unit (microprocessor) 441, specifically

5 regarding the sound interrupt function for the generation of sound effects, etc. In connection with the sound interrupt function, control unit 441 has a clock unit 500; a timer unit 501, which is connected to this clock unit, has a down-counter 502 and determines the interrupt period; an interrupt controller 503, which is connected to the timer unit; CPU unit 504 which is connected to this interrupt controller unit and receives the interrupt signal; a  
10 bus controller 505, which is connected to the CPU; and a D/A converter 506 which is connected to this bus controller. Connected to the D/A converter 506 is an amplification unit (AMP) 507, and the speaker 447 is connected to the AMP 507.

The down-counter 502, in which a certain number is set, is decremented within the timer unit 501 by the clock signal from the clock unit 500, the prescribed interrupt period  $t$   
15 is formed, and an interrupt signal is generated with respect to CPU 504 via the interrupt controller 503; that is, interrupt control is applied. CPU 504 is connected to a memory in which music or sound is recorded (for example, nonvolatile memory 44b), and if there is a request to generate a sound effect at this interrupt period  $t$  in the program that is being executed, it reads the sound waveform data and sets the value of the sound waveform data  
20 in D/A converter 506 via bus controller 505.

Sound waveform data in digital format is converted to values in analog format in the D/A converter 506. This analog sound value is amplified by amplification unit 507 into an electric current value suitable for speaker 447 and drives the speaker.

Figure 8A is a conceptual diagram explaining the relationship between this fixed interrupt period  $t$  and sound waveform  $Sw$ . In general, in order to play music on the electronic device, to digitally reproduce a sound that originally forms a sine wave of analog values, a rectangular wave is used that faithfully is patterned after this sine wave. That is, sound waveform  $Sw$  is formed by a rectangular wave (digital data) that closely approximates the original sound from the game software. Timer control unit 501 sends an interrupt signal to CPU 504 at a fixed period, and every time this is done the value corresponding to sound waveform  $Sw$  read by CPU 504 with this interrupt timing is set in D/A converter 506.

However, if the interrupt period  $t$  is thus fixed, the sound waveform  $Sw$  and interrupt period  $t$  will be generated separately and independently, with no correspondence or coordination between the two. As a result, the timing of the rise and fall of the rectangular wave that forms sound waveform  $Sw$  and the timing of interrupt period  $t$  will not agree, and a discrepancy will arise between the two timings.

Due to this slight mismatch of timing, the original sound written into the game software will not be faithfully reproduced. In such a case, when the spectrum of the sound emitted from speaker 447 is analyzed by FFT (fast Fourier transform), non-integer multiples of the fundamental frequency will be included in addition to the original sound (the fundamental frequency), which for example is 440 Hz denoting the musical tone "do"



and its integral multiples (880 Hz, 1320 Hz, ...). Such a sound containing non-integral multiples of the fundamental tone sounds is very muddy to the human ear.

In this case, the interrupt period  $t$  is the resolution with respect to sound waveform  $Sw$ , so sound waveform  $Sw$  can be reproduced with greater fidelity by making interrupt period  $t$  very short. That is, it is possible to increase the probability of a match between the timing of the rise and fall of the rectangular wave that forms sound waveform  $Sw$  and the timing of interrupt period  $t$ .

But shortening the interrupt period  $t$  will cause CPU 504 to be subjected to an interrupt with that much greater frequency, which will correspondingly increase the burden on CPU 504 which executes other control such as image control.

Specifically, to strike a balance between the demands for reproducibility of sound waveform  $Sw$  and for reducing the burden on CPU 504, the interrupt period  $t$  is normally set to about 23 to 90 microseconds. But even with such an interrupt period  $t$ , the position at which the amplitude of sound waveform  $Sw$  switches (the timing) will be slightly off from the original sound, resulting in a played-back wave that is slightly off from the original waveform and generating a playback sound in which non-integral multiples of the fundamental tone are mixed in.

Therefore it has been necessary to develop a method that can faithfully play back the original sound while reducing the burden on CPU 504, and a portable electronic device that can implement this method.

[Dynamic modification of the interrupt period]

This invention has been devised, based on the discovery by the inventors that the original sound can be played back faithfully while reducing the burden on CPU 504 by dynamically altering (timing), in accordance with the original sound, the interrupt period  $t$  with respect to CPU 504.

5 This is explained using Figure 7B. In running the game software, when music, sound effects, or other sound generation information has been written into the game software, CPU 504, via bus controller 505, sets the down-counter 502 of timer unit 501 to a value that is determined based on the period  $T$  of this sound. For example, when the period of the sound is  $T$ , the down-counter 502 is set so that the interrupt period  $t$  is  $T/2$ .

10 As a result, by operation of interrupt counter 502, timer unit 501 generates an interrupt signal with respect to CPU 504 with interrupt period  $t = T/2$ .

Figure 8B is a diagram that explains this situation. When sound waveform  $Sw$  is  $T1$ , interrupt period  $t$  is generated at  $t = T \cdot 1/2$ . Similarly, when, in the next stage, sound waveform  $Sw$  is changed to  $T2$ , interrupt period  $t$  is generated at  $t = T \cdot 2/2$ . By dynamically  
15 modifying interrupt period  $t$  in this way based on the sound waveform data of the original sound, the discrepancy between the timing of interrupt period  $t$  and the timing of the rise and fall of sound waveform  $Sw$  is completely or almost completely eliminated.

A further advantage of the present invention is that the half-period  $T/2$  of sound waveform  $Sw$  is generally much longer than the usual fixed interrupt period  $t$ . That is, the  
20 dynamically altering interrupt period  $t = T/2$  is much longer than the usual fixed interrupt period, so the frequency of generation of an interrupt signal with respect to CPU 504 is reduced, which greatly reduces the burden on CPU 504. Specifically, for a sound of

frequency 1 kHz (period  $T = 1/1000$  second), it suffices to have an interrupt frequency of 2 kHz (period  $t = 1/2000$  second = 500 microsecond). This results in a much smaller number of interrupts and a great reduction in burden on CPU 504 as compared with the 23 to 90 microseconds in the case where interrupt period  $t$  is fixed.

5        The resolution of the dynamically altering interrupt period is ultimately equal to the resolution of the timer unit, so the reproducibility of the sound waveform is the highest that is theoretically realizable. The result is clear playback sound that is faithful to the original sound.

10        Changing the interrupt period  $t$  to  $1/2$  the sound generation period is just a working example, and it should be noted that even if it is  $1/3$ ,  $1/4$ , ..., etc. of the sound generation period, it falls within the scope of this invention as long as the burden on CPU unit 504 is reduced as compared with a fixed-period interrupt period.

15        The present invention is not limited to the portable electronic device in an entertainment system. It should be noted that this invention is technology that can be applied to all electronic devices that adopt the form of generating sound by generating an interrupt signal with respect to CPU 504.

      This invention makes it possible to provide, in an electronic device, a method by which playback sound is obtained that is true to the original sound.

20        The present invention also makes it possible to provide, in an electronic device, a sound function by which a playback sound is obtained that is true to the original sound.

      The present invention also makes it possible to provide an electronic device that has a sound function by which a playback sound is obtained that is true to the original sound.

This invention also makes it possible to provide an entertainment system that has a portable electronic device that has a sound function by which a playback sound is obtained that is true to the original sound.

[illegible]

## CLAIMS

What is claimed is:

1. A method for clearly generating a playback sound in an electronic device including a

5 CPU and a speaker, the method comprising the steps of:

dynamically altering a CPU interrupt signal in accordance with a sound data that is  
read from a CPU memory; and

10 emitting to a speaker of the electronic device said sound data obtained in connection  
with said CPU interrupt signal, wherein the timing between said sound data and the timing  
of said CPU interrupt signal are made to agree with each other to provide a clear playback  
sound.

2. A method for generating clear playback sound in an electronic device including a CPU  
and a speaker, the method comprising the steps of:

15 dynamically altering a period of a CPU interrupt signal in accordance with a period  
of the sound data that is read from a CPU memory; and

emitting to the speaker said sound data obtained in connection with said CPU  
interrupt signal, wherein the timing between said sound data and the timing of said CPU  
interrupt signal are made to agree with each other to provide a clear playback sound.

20

3. The method for generating playback sound according to claim 2, wherein in said  
altering step the period of the CPU interrupt signal is dynamically altered in

correspondence with a period T of said sound data, the period of the CPU interrupt signal is dynamically altered, and the period t of said CPU interrupt signal is dynamically altered to  $T/n$  where  $n = 2, 3, \dots$

- 5 4. The method for generating playback sound according to claim 2, wherein in said altering step

the period of the CPU interrupt signal is dynamically altered in correspondence with period T of said sound data,

the period t of said CPU interrupt signal is dynamically altered to  $T/2$ .

- 10 5. A method for clearly generating a clear playback sound, in an electronic device including a CPU, a timer unit and a speaker, the method comprising the steps of:

reading image data and audio data under CPU control, and

in accordance with said read audio data, generating by said

15 timer unit a CPU interrupt signal which is controlled;

dynamically altering said interrupt signal;

emitting to the speaker said sound data obtained in accordance with said CPU

interrupt signal, wherein the timing between said sound data and the timing of said CPU

interrupt signal are made to agree, the burden on the CPU is reduced, and a playback sound

- 20 is generated from the speaker.

6. An electronic device comprising:

a timer unit that generates a CPU interrupt signal,  
a CPU that specifies sound data by the timing of said interrupt signal,  
a D/A converter that changes said sound data to an analog signal, and  
a speaker that emits sound that corresponds to said analog signal;

5        said CPU controlling said timer means in accordance with a period of said sound  
data, dynamically altering a period of said CPU interrupt signal, causing a switching timing  
of said sound data and the period of said CPU interrupt signal to agree, and generating a  
clear playback sound.

10    7. The electronic device according to claim 6, wherein

the period of said CPU interrupt signal is dynamically altered to  $T/n$  (where  $n = 2, 3, \dots$ ) with respect to period  $T$  of said sound data.

8. The electronic device according to claim 7, wherein

15        the period of said CPU interrupt signal is dynamically altered to  $T/2$ .

9. An electronic device comprising:

a clock unit;

a CPU;

20        a down-counter;

a timer unit connected to said clock unit and generates an interrupt signal using said  
down-counter;

an interrupt controller connected to said timer unit;

said CPU being connected to said interrupt controller;

a bus controller connected to said CPU;

a D/A converter connected to said bus controller;

5 an amplification unit connected to said D/A converter;

a speaker connected to said amplification unit; and

an electronic means causing said CPU to control said down-counter based on the period of the sound data, generate said interrupt signal, determine the sound data based on said interrupt signal, emit the sound data via said bus controller and said amplification unit to said speaker, and generate a clear playback sound.

10 10. The electronic device according to claim 9, wherein said CPU

dynamically alters the period  $t$  of said interrupt signal to  $T/n$  (where  $n = 2, 3, \dots$ ) when the period of said sound data is  $T$ .

15

11. The electronic device according to claim 10, wherein said CPU

dynamically alters the period  $t$  of said interrupt signal to  $T/2$  when the period of said sound data is  $T$ .

20 12. The electronic device according to claim 9, which

is a portable electronic device that is detachably connected to a parent machine and can play a game independently when detached from said parent machine.



13. An entertainment system comprising a portable electronic device which is a child machine that is detachably mounted to a parent machine, and an interface for making an electrical connection to said parent machine,

5       said portable electronic device comprising:

a CPU;

a timer that generates a CPU interrupt signal;

said CPU specifying a sound data by the timing of said interrupt signal;

a D/A converter that converts said sound data to an analog signal; and

10       a speaker that emits sound corresponding to said analog signal.

14. The entertainment system as described in claim 13, which

dynamically alters the period of said CPU interrupt signal to  $T/n$  (where  $T$  is a period of the sound data and  $n = 2, 3, \dots$ ).

000270" E 2E88460

### Abstract of the Disclosure

0002T0" E4E8B460  
5 A method and an electronic device for obtaining clear playback sound that is faithful to the original sound, in which image data and audio data are played back under control of a CPU, and in accordance with the played-back audio data, a timer, which generates a CPU interrupt signal, is controlled and said interrupt signal is dynamically altered. The sound data obtained in accordance with the CPU interrupt signal is emitted to a speaker, thereby causing the timing of the sound data and the timing of the CPU interrupt signal to agree with each other, thus reducing the burden on the CPU, and generating a  
10 clear playback sound from the speaker.

Representative Figure: FIG. 7

15

20

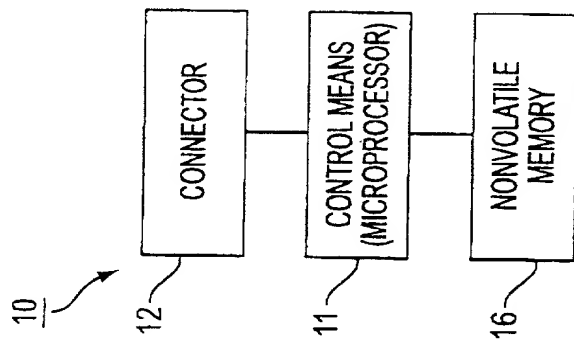


FIG. 1A

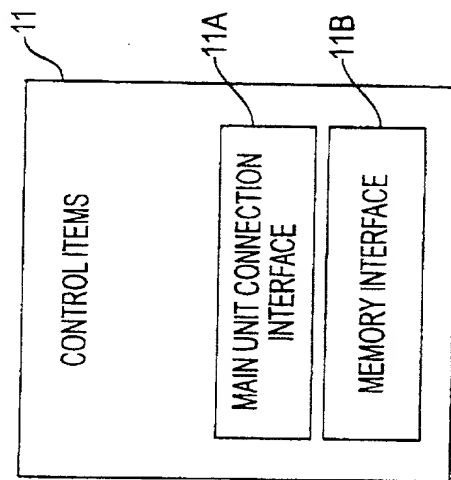


FIG. 1B

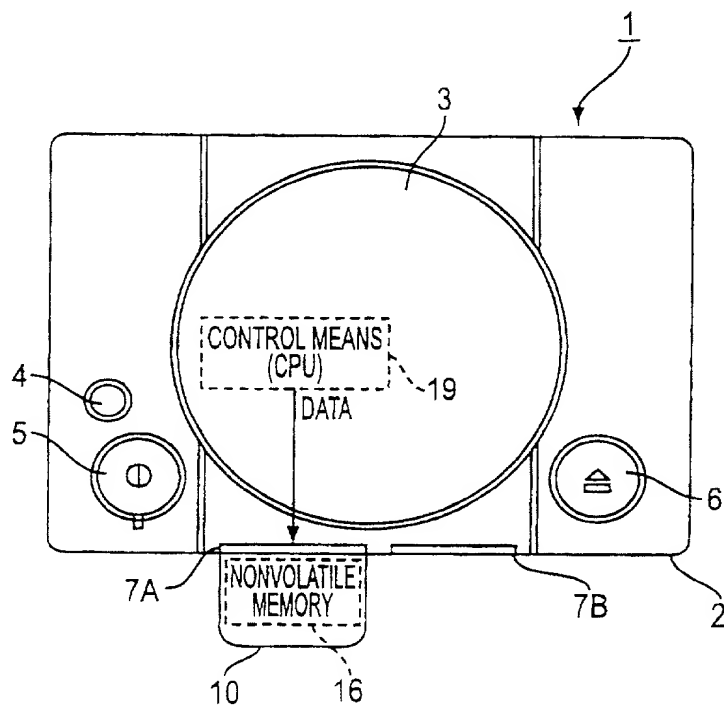


FIG. 2

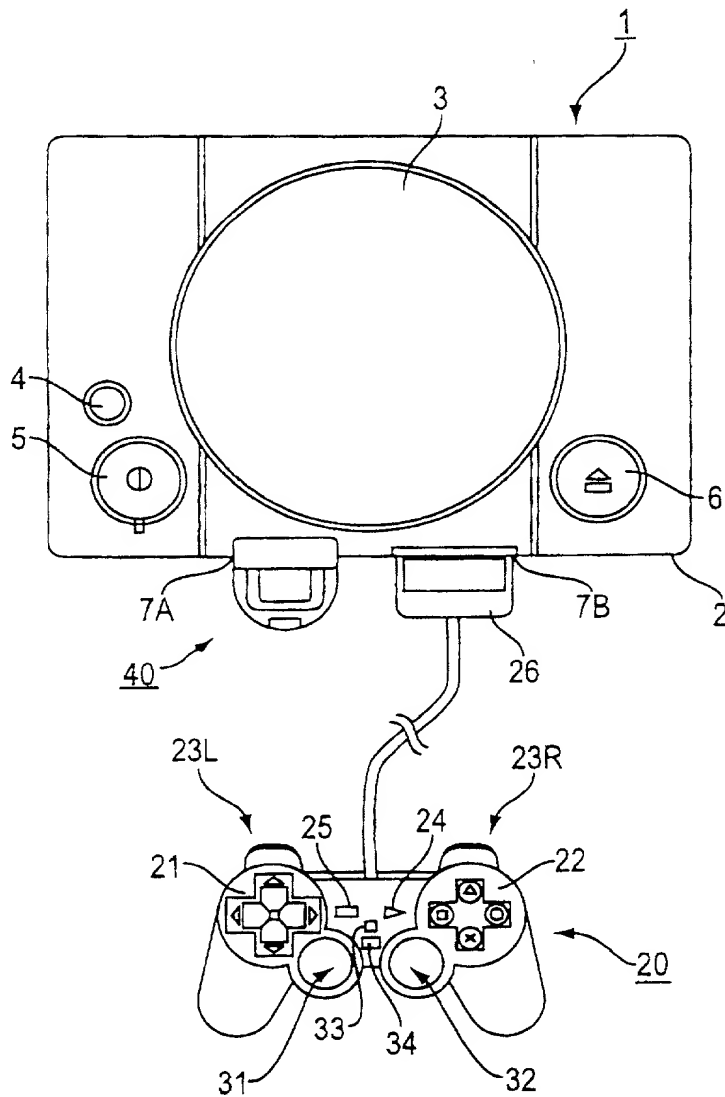


FIG. 3

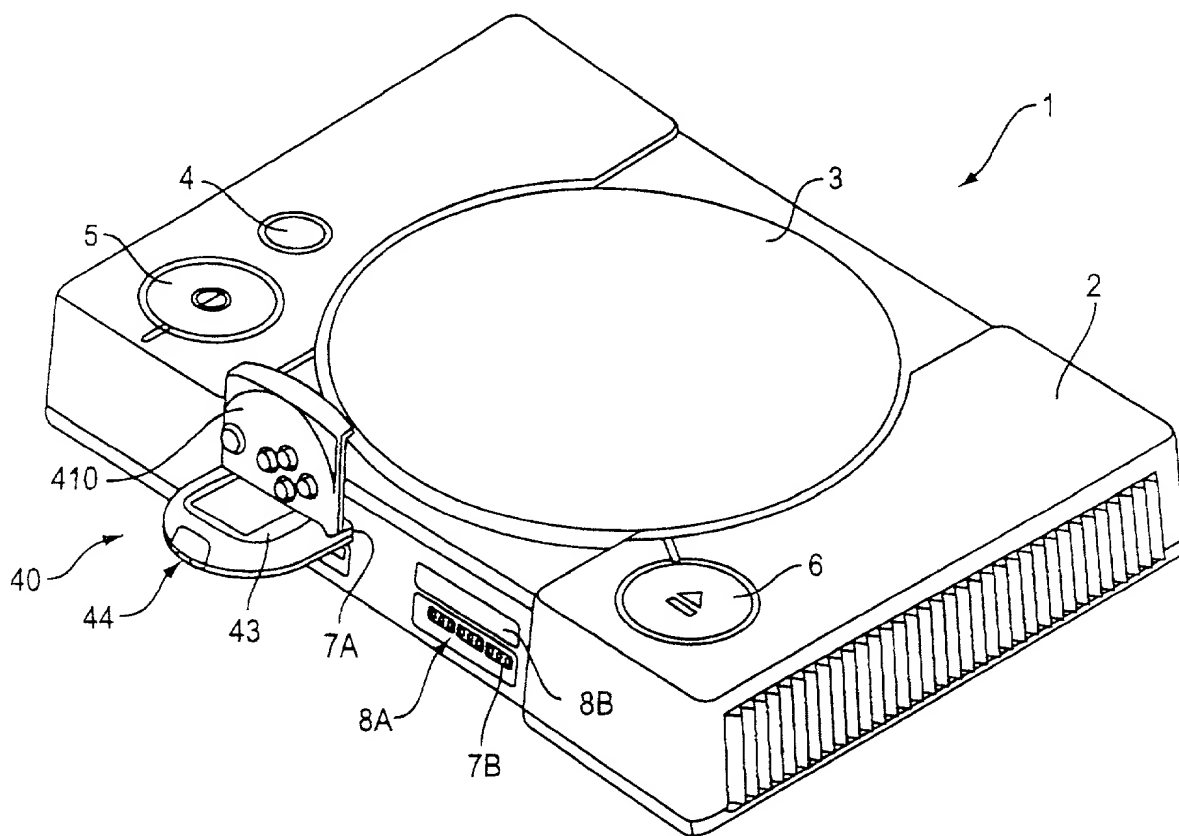
[illegible]

FIG. 4

FIG. 5A

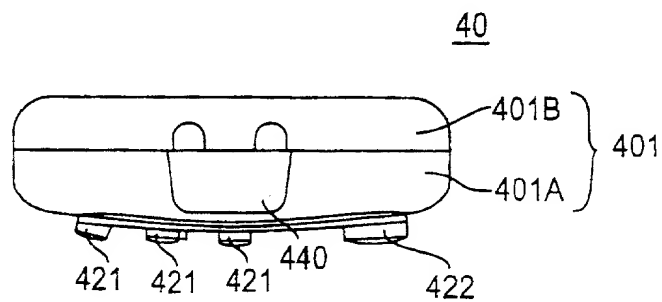


FIG. 5B

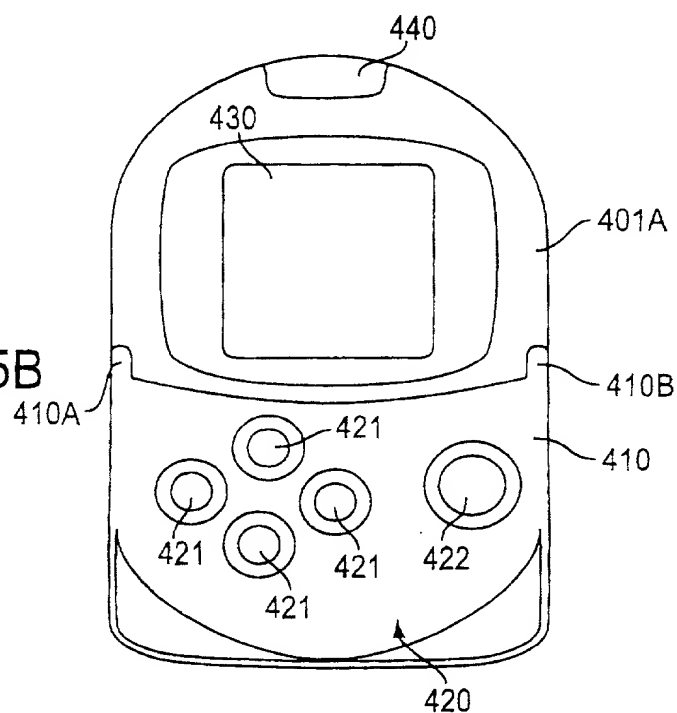
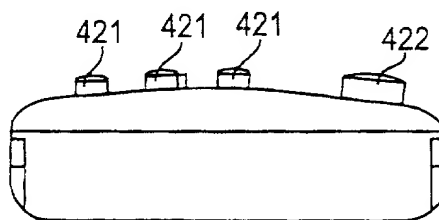


FIG. 5C



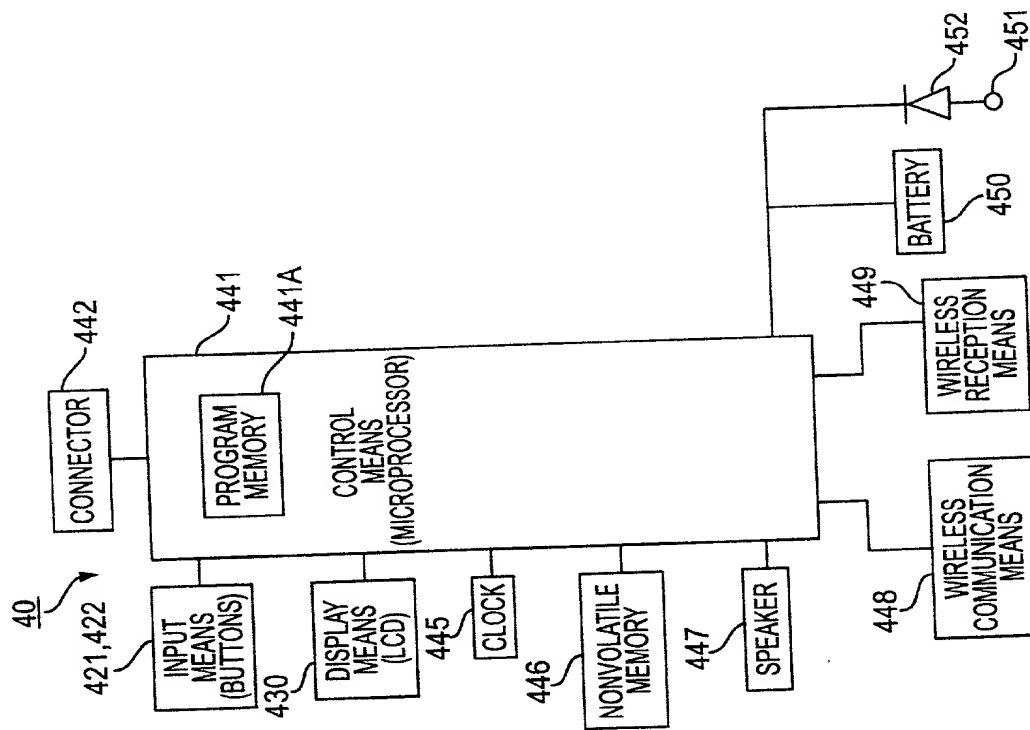


FIG. 6A

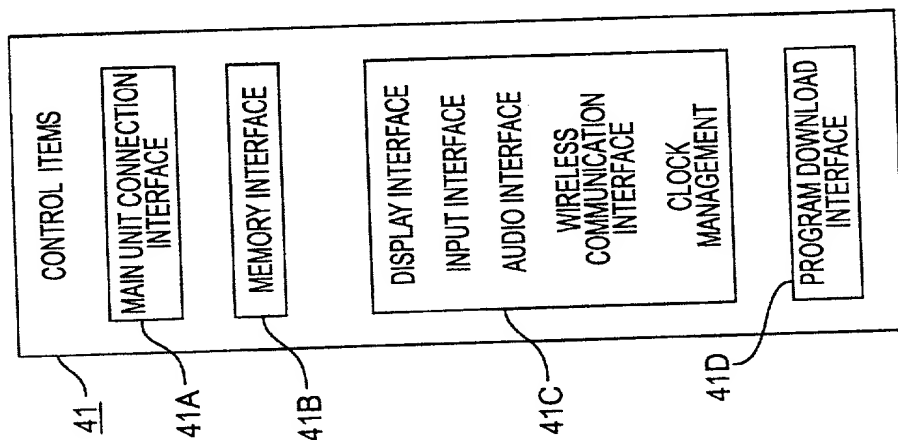


FIG. 6B



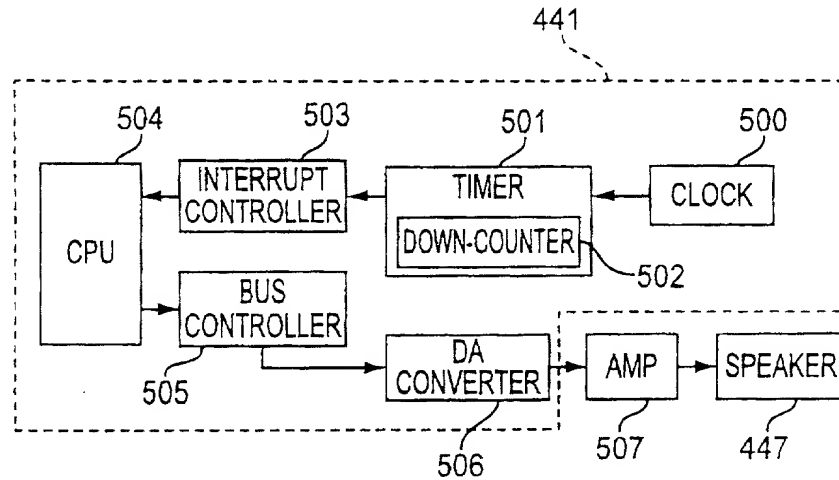


FIG. 7A

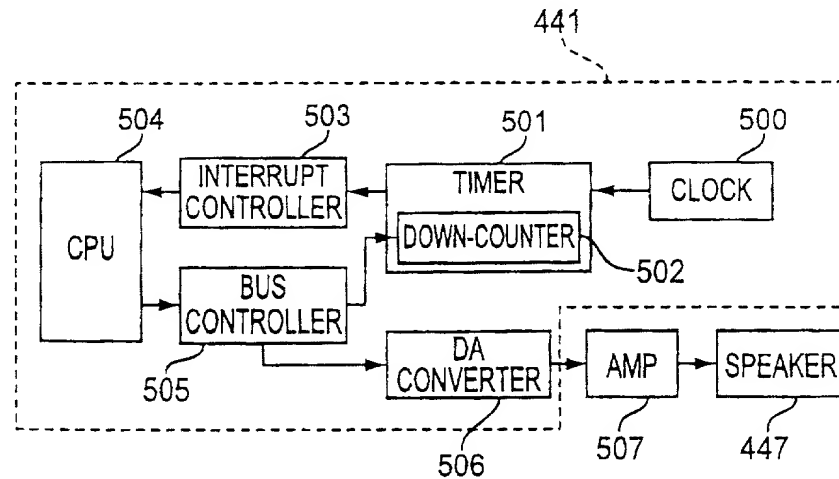


FIG. 7B

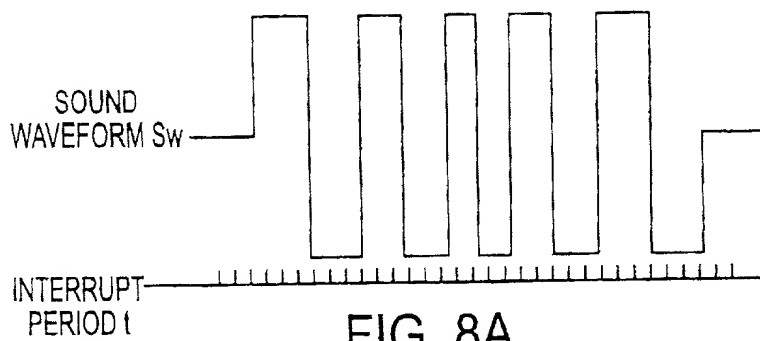


FIG. 8A

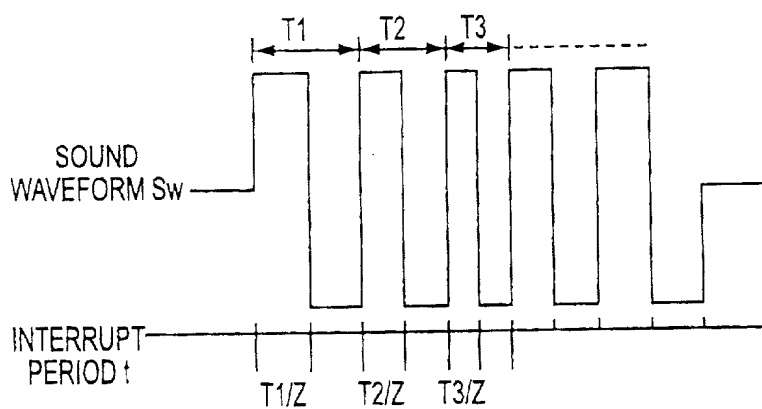


FIG. 8B

## DECLARATION FOR PATENT APPLICATION

Docket No. SCEI 16.895

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD FOR GENERATING PLAYBACK SOUND, ELECTRONIC DEVICE, AND ENTERTAINMENT SYSTEM FOR GENERATING PLAYBACK the specification of which SOUND

(check one) ☒ is attached hereto

☐ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**Prior Foreign Application(s)**  
Priority Claimed

<u>P11-013508</u> (Number)	<u>Japan</u> (Country)	<u>21/01/1999</u> (Day/Month/Year Filed)	Yes	No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	Yes	No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status-patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status-patented, pending, abandoned)

I hereby appoint as my attorney and agent **Aaron B. Karas, Reg. No. 18,923, Samson Helfgott, Reg. No. 23,072, Leonard Cooper, Reg. No. 27,625, Russell Gross, Reg. No. 40,007, and Linda S. Chan, Reg. No. 42,400** to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all correspondence to: **HELFGOTT & KARAS, P.C.**  
Empire State Building, 60th Floor  
New York, New York 10118-0110  
Telephone No.: (212) 643-5000

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Toru MORITA  
Inventor's Signature 野田 徹 Date 1/19/00  
Residence Kanagawa, Japan Citizenship Japan  
Post Office Address c/o Sony Computer Entertainment Inc.  
1-1, Akasaka 7-chome, Minato-ku, Tokyo 107-0052, Japan

000270" EZE88460